

Configuring the aACE Launcher

Last Modified on 01/06/2022 11:30 am EST


The aACE Launcher is a FileMaker document which provides one-click access to aACE. You must configure the launcher with the IP address or DNS address pointing to the aACE Server at the appropriate time – if your server is configured using:

- An IP address – Configure the launcher *after* aACE is hosted.
- A DNS address – Configure the launcher *prior* to aACE being hosted.

Note: If the server address changes for any reason, you will need to re-configure the launcher to point to the new address.

Configuring the Launcher

1. [Download an unconfigured launcher](https://aace.egnyte.com/dl/LSmSxoai8W) (<https://aace.egnyte.com/dl/LSmSxoai8W>).
2. Extract the zipped .fmp12 file, then use it to launch aACE.
3. Enter the name of the server where your aACE system is hosted, then login.

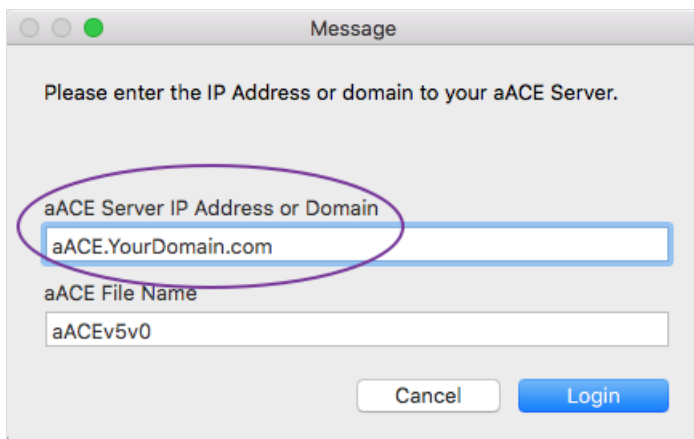

4. Compress the launcher.
5. Login to aACE and navigate from **Main Menu > System Admin > Preferences > Database Management**.
6. In the Downloads section, add the compressed launcher file.
Note: This enables users to download the launcher themselves.
7. Click **Commit Updates**.